





IP65 Wall mounted semi-decorative luminaire

## **Product Description**

This well proportioned circular luminaire has an impact resistant opal polycarbonate body and diffuser. A useful feature is the two opposing 20mm conduit side entries, this enables the luminaire to be truly surface mounted and conduit wired.

Self contained luminaire

High efficiency 38 and 55 watt 2D compact fluorescent lamps are accommodated which provide an even level of illumination. The high frequency control gear produces flicker free operation with instant start and extended lamp life. Emergency versions are also available.

## **Product Features**

- Energy efficient high frequency control gear as standard
- Easy lamp replacement and maintenance
- · Opal impact resistant polycarbonate diffuser
- High quality sub components are used to extend service life.

### **Applications**

- Schools
- Libraries
- Reception areas
- Stairwells






# Scrivea

IP65 Wall mounted semi-decorative luminaire

#### **Dimensions**

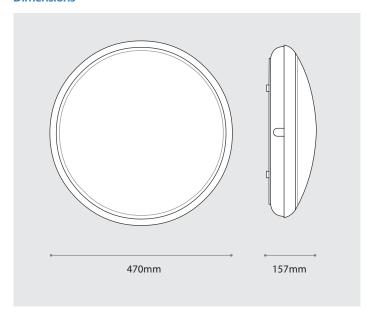

#### **Finishes**

SL - Silver

BL - Black

GR - Grey

## **Control Gear Options**

**HF** - High frequency control gear

## **Emergency Options**

AT - Auto test function

**CT** - Central test function

**CB** - Central battery slave unit

## **Order Codes**

Order Code	Wattage	Lamp Type	Control Gear
EZSC470/38/*	1 x 38	2D Compact Fluorescent	High Frequency
EZSC470/38/M3/*	1 x 38	2D Compact Fluorescent	High Frequency with a three hour maintained emergency function
EZSC470/38/NM3/*	1 x 38	2D Compact Fluorescent	High Frequency with a three hour maintained emergency function
EZSC470/55/*	1 x 55	2D Compact Fluorescent	High Frequency

<sup>\*</sup> Add suffix for finish

EG. EZSC470/38/NM3/GR 1 x 38 watt 2D Scrivea surface mounted luminaire with a grey body, opal diffuser and a non maintained 3 hour emergency lighting option.

