

## Self contained luminaire

## Product Description

An emergency luminaire developed specifically for applications with higher mounting heights where a good level of emergency directional floodlighting and ingress protection is required for specific areas.

# Serchio 55

### 2 x 55 watt IP65 twin spot high level emergency luminaire

#### **Product Features**

- Body: Fabricated from corrosion resistant white (RAL 9010) powder coated steel
- · Must be mounted vertically on walls or stanchions
- Twin head fully adjustable projectors incorporate 55 watt tungsten halogen lamps for maximum illumination
- SVLA sealed lead acid battery with constant current charger, battery protection and LED charge indicator
  re-charge period 24 hours
- Ambient temperature 0 to 25 Centigrade
- Premium quality sub components assure a trouble free service life
- One or three hour duration options available
- Designed to BS EN 60598-2-22

#### **Applications**

- Warehouses
- Factories
- Sports Centres
- Atriums






# Serchio 55

2 x 55 watt IP65 twin spot high level emergency luminaire

#### **Dimensions**

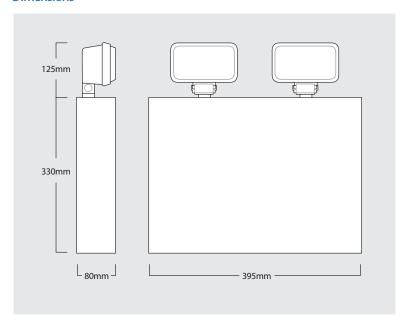

#### **Order Codes**

Order Code	Weight	Light Source	Mode	Duration
EZ/SER55/255/NM1	10.5Kg	2 x 55 watt Halogen Incandescent	Non-Maintained	1 hours
EZ/SER55/255/NM3	16.5Kg	2 x 55 watt Halogen Incandescent	Non-Maintained	3 hours

